




ELP15

Lithium-Ion Powered Low Lift Pallet Truck
1500 kg

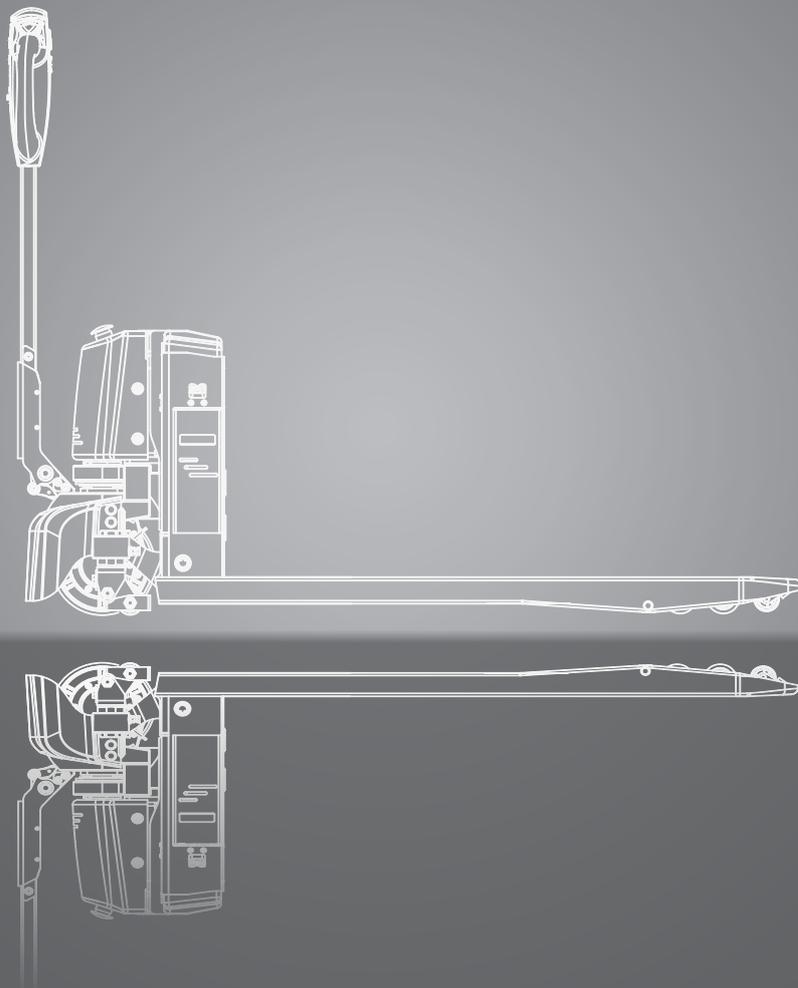

DIMENSIONS

ELP15

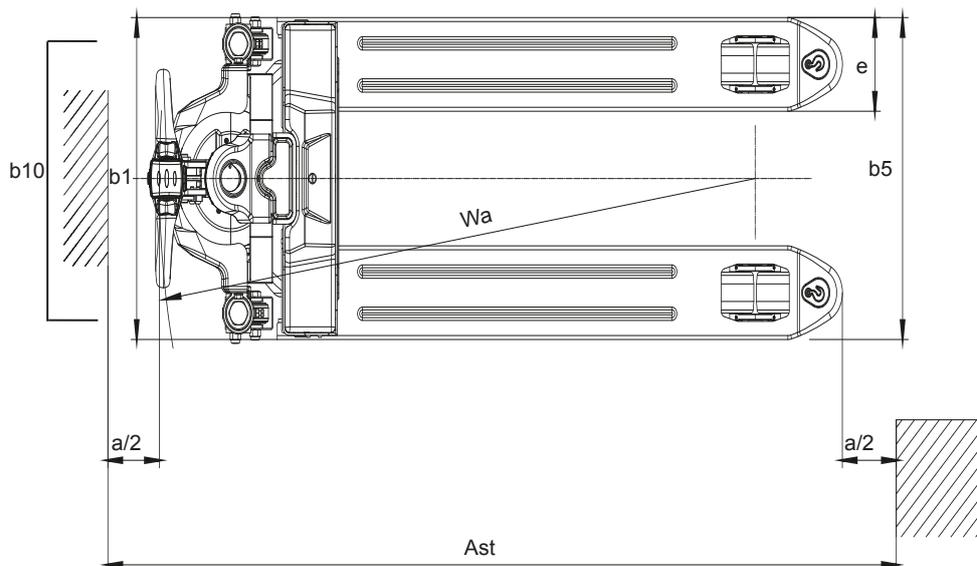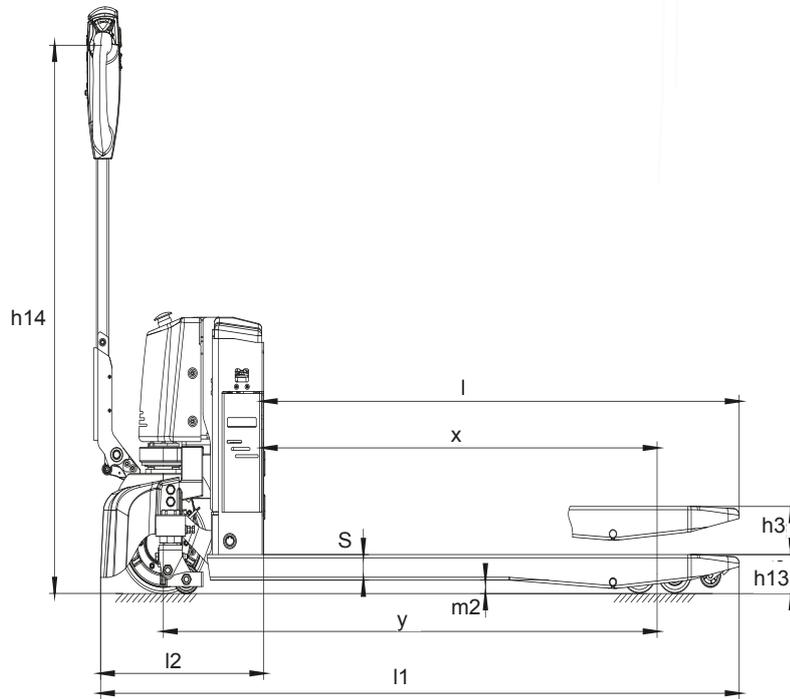

For corresponding data see specification chart.

SPECIFICATIONS

Product specification acc. to VDI 2198

| | 1.1 | Manufacturer (Abbreviation) | CLARK |
|----------------|-------------|--|-------------------------------|
| Specifications | 1.2 | Manufacturer's designation | ELP15 |
| | 1.3 | Drive unit | Electric-24V |
| | 1.4 | Operator type stand on/driver seated | Pedestrian |
| | 1.5 | Load capacity/rated load | Q (kg) 1500 |
| | 1.6 | Load centre distance | c (mm) 600 |
| | 1.8 | Load distance, centre of drive axle to fork face | x (mm) 950 |
| | 1.9 | Wheelbase | y (mm) 1195 |
| Weight | 2.1 | Service weight | kg 135 |
| | 2.2 | Axle loading, laden front/rear | kg 665 / 970 |
| | 2.3 | Axle loading, unladen front/rear | kg 95 / 40 |
| Tyres, Chassis | 3.1 | Tyres | Polyurethane |
| | 3.2 | Tyre size, front | Ø 210 x 70 |
| | 3.3 | Tyre size, rear single | Ø 80 x 93 |
| | | Tyre size, rear tandem | Ø 80 x 70 |
| | 3.5 | Wheels, number front/rear (x = drive wheels) | 1x/2 |
| | 3.6 | Tread, front | b ₁₀ (mm) 460 |
| | 3.7 | Tread, rear | b ₁₁ (mm) 390 |
| Dimensions | 4.4 | Lift height | h ₃ (mm) 110 |
| | 4.9 | Height drawbar in driving position min./max. | h ₁₄ (mm) 650/1135 |
| | 4.15 | Lowered fork height | h ₁₃ (mm) 80 |
| | 4.19 | Overall length | l ₁ (mm) 1545 |
| | 4.20 | Length to face of forks | l ₂ (mm) 395 |
| | 4.21 | Width | b ₁ (mm) 550 |
| | 4.22 | Fork dimensions | s*e*I (mm) 50*160*1150 |
| | 4.25 | Width across forks min/max | b ₅ (mm) 550 |
| | 4.32 | Ground clearance centre of wheelbase | m ₂ (mm) 27 |
| | 4.34.1 | Stacking aisle for pallets (l6 · b12) 1000 x 1200 across | Ast (mm) 2150 |
| | 4.34.2 | Stacking aisle for pallets (l6 · b12) 800 x 1200 along | Ast (mm) 2015 |
| | 4.35 | Turning radius | Wa (mm) 1345 |
| | Performance | 5.1 | Travel speed laden/unladen |
| 5.2 | | Lift speed laden/unladen | m/s 0.03/0.06 |
| 5.3 | | Lowering speed laden/unladen | m/s 0.068/0.043 |
| 5.8 | | max. gradeability laden/unladen (S2 5 min.) *1 | % 5/20 |
| 5.10 | | Service brake | electro magnetic |
| Drive line | 6.1 | Drive motor output (S2 60 Min.) | kW 0.75 |
| | 6.2 | Lift motor output S3 15 % | kW 0.8 |
| | 6.4 | Battery voltage, nominal capacity K5 | V/Ah 24/25 |
| Misc. | 8.1 | Type of control | DC |
| | 8.4 | Sound level, driver's ear DIN/EN 12053 | dB (A) 70 |

*1 At friction coefficient $\mu=0.6$ with 1.6 km/h

All values shown are for standard lift truck with standard equipment. If the truck is supplied with options, values may change. The specifications apply under normal operating conditions. All values given may vary + 5 % and - 10 % due to the motor and system tolerances and represent nominal values obtained under typical operating conditions. CLARK reserves the right to change products and specifications without prior notice.

EQUIPMENT EXTRAS

| | Equipment feature | ELP15 |
|--|---|--------------|
| General | Handy lithium-ionen battery (LFP) | • |
| | Low vehicle weight (135 kg) | • |
| | Electric driving, lifting and lowering | • |
| | Balanced weight distribution (lift hydraulics positioned above the battery) | • |
| | Clean cable routing with reduced mechanical wear | • |
| | Battery discharge indicator | • |
| Dimensions | Width across forks: 550 mm | • |
| | Width across forks: 680 mm | x |
| | Fork length: 1150 mm | • |
| | Fork length: 1220 mm | x |
| Battery and Charging Technology | Lithium-ion battery (24 V / 25 Ah) with charger 24 V / 10 A (external) | • |
| | Lithium-ion battery (24 V / 60 Ah) with charger 24 V / 20 A (external) | x |
| | Additional exchange batteries or chargers | x |
| Safety and Operation | Side support rollers | x |
| | Activation via key switch | • |
| | Activation via PIN-Code | x |
| | Emergency reverse switch (belly switch) | • |
| | Automatic lift cut-out at maximum lift height | • |

• = Standard equipment; x = Option

FEATURES & ADVANTAGES

ELP15

Safe and compact

- Electric lifting and lowering
- Automatic braking when the tiller arm is released
- Excellent manoeuvrability in confined areas:
 - Overall width (b1) only 550 mm
 - Length to face of forks (L2) only 395 mm
 - Turning radius (WA) only 1345 mm

Operation


- 24 V drive with Li-ion technology
- Smooth and quiet operation
- High availability through opportunity charging
- Short charging times
- Fast lift and lower speeds
- Very good gradeability, loaded and unloaded
- Balanced weight distribution due to lift hydraulics positioned above the battery
- Robust metal frame for demanding everyday use

Operator-friendly

- Programmable driving behaviour via service access
- Ergonomically positioned controls
- Suitable for left- and right-handed users

Maintenance-friendly

- Clean cable routing with reduced mechanical wear
- Easy access to components for service and maintenance
- Quick, tool-free battery replacement

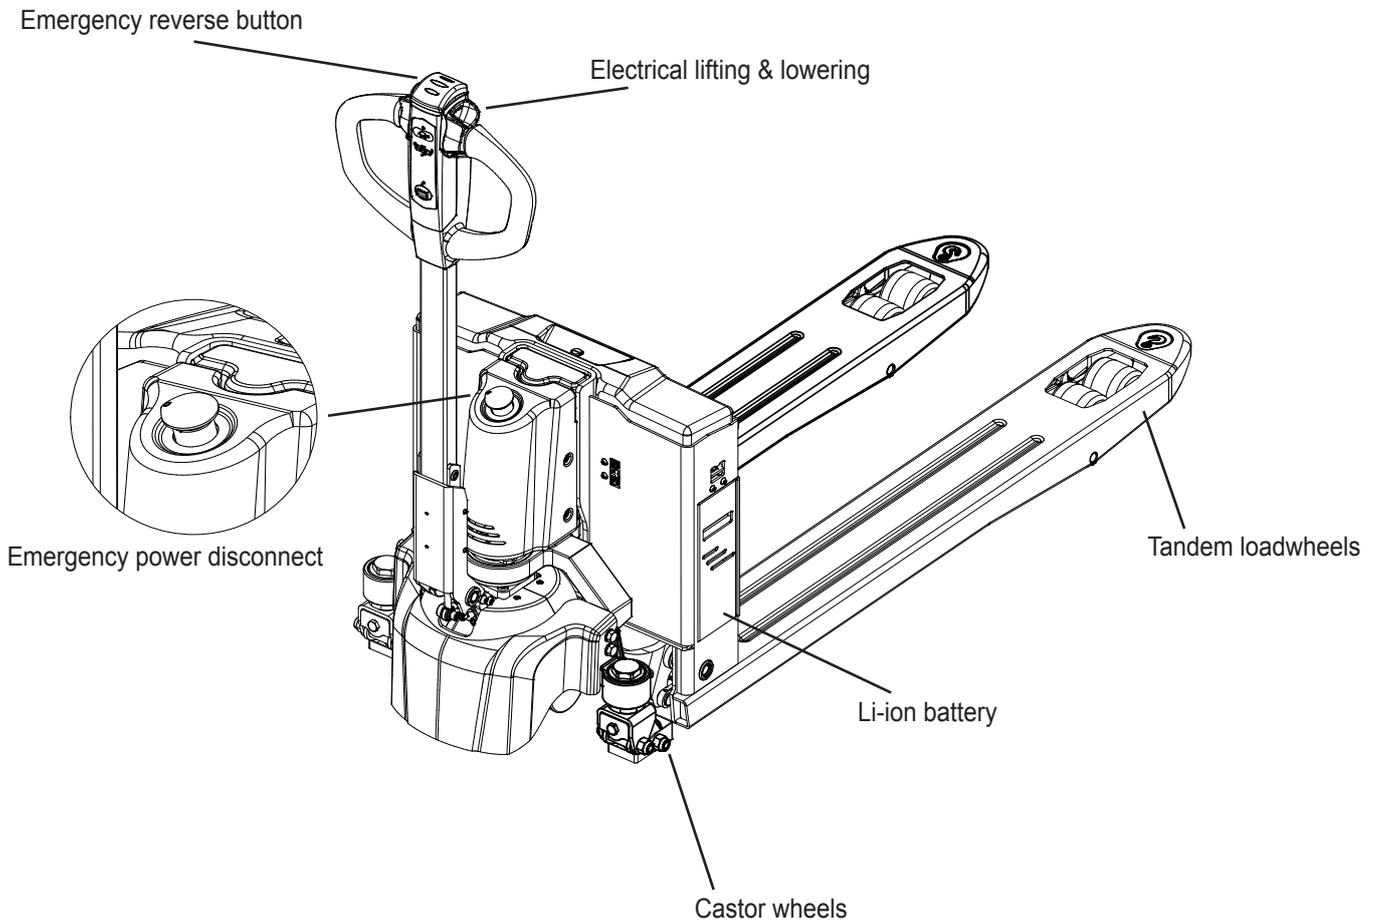

PRODUCT DESCRIPTION



ELP15

ELP15 - Safe and reliable

The ELP15 is a compact low lift pallet truck designed for daily goods handling. It is ideal for short transport distances and versatile applications in warehouses, retail and production environments. Its electric driving and lift functions support ergonomic working and high availability.

The robust metal frame protects the truck during everyday operation and supports a long service life. Thanks to its compact design (L2 dimension 395 mm), the ELP15 can be manoeuvred precisely in confined areas.

Operator-friendly

The ELP15 is designed for simple and intuitive operation. The tiller arm combines key functions such as driving, lifting, lowering and emergency stop in a clearly laid out control area. Direct driving control supports precise load positioning.

A turtle mode function is available with the tiller arm in the upright position. This supports safe manoeuvring in very confined spaces, for example in sales areas, on lorry loading bays or in narrow warehouse aisles.

The small turning radius further improves manoeuvrability. Optional side support rollers provide stable driving behaviour, even on uneven surfaces or when cornering without a load. The battery can be removed and replaced quickly from the side. Replacement is tool-free and can be completed in a few simple steps.

Easy Maintenance

The layout with easily accessible components reduces effort during daily checks and maintenance. The metal cover protects internal components against impacts and damage. It can be opened quickly, providing straightforward access for service work.

A key advantage is the well-balanced weight distribution. The lift hydraulics are positioned above the battery rather than behind it. This supports a balanced truck layout and clean cable routing. The cables are better protected against mechanical wear. Maintenance-related components are easy to access.

Driving parameters can be adjusted via the service access. This allows the ELP15 to be set up to suit the specific application.

Li-ion Technology

The ELP15 is equipped with a long-life lithium-ion battery. It is maintenance-free and can be opportunity charged at any time without reducing service life. Short opportunity charges, for example during breaks, increase operating time and support high availability.

The external charger enables charging from any standard 230 V socket. No additional charging infrastructure is required.

Dealer:

CLARK Europe GmbH
Dr.-Alfred-Herrhausen-Allee 33
47228 Duisburg / Germany
Tel.: +49 (0)2065 499 13-0
Fax: +49 (0)2065 499 13-290
E-Mail: Info-europe@clarkmheu.com
www.clarkmheu.com

03/2026

Valid for Lot-no.: 13006