

C60/70/80D


C60/70/75L

C80D900

Diesel or LPG engine



Pneumatic Tyres

6.000 kg 7.000 kg 7.500 kg 8.000 kg


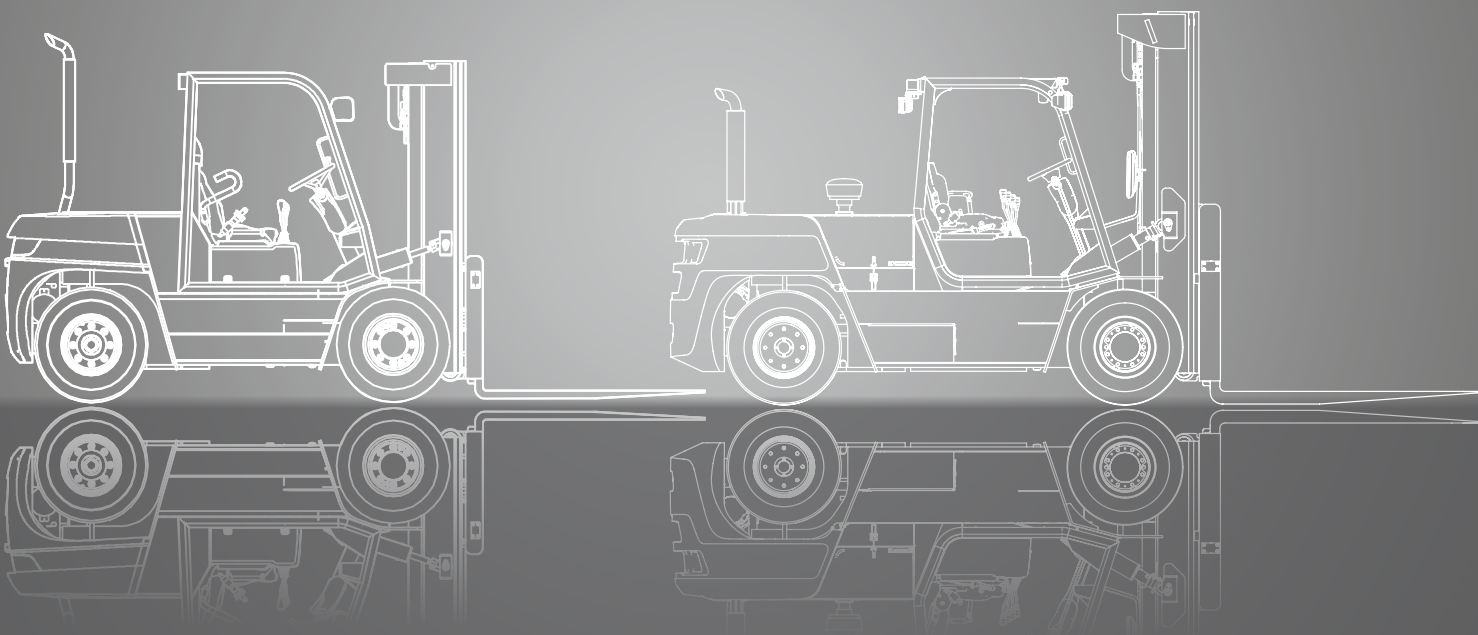


DIMENSIONS

C60/80

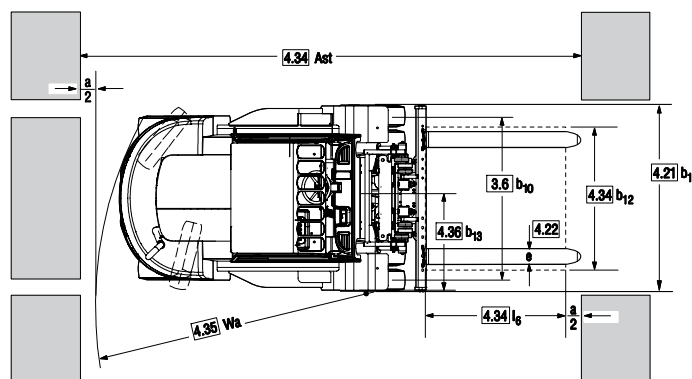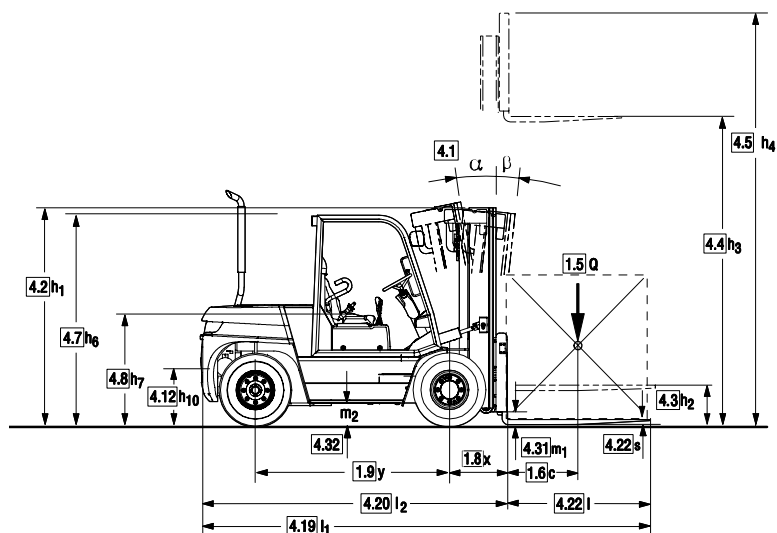

C80D900

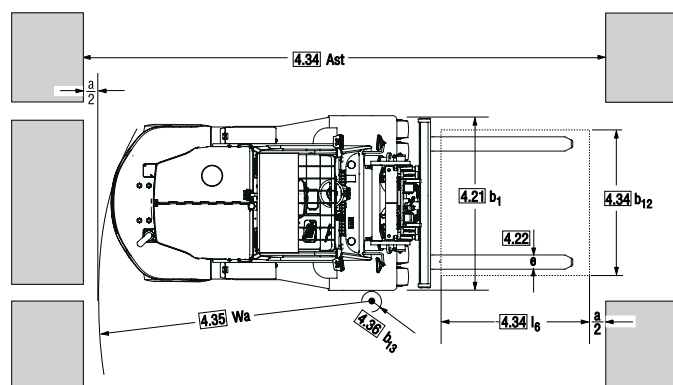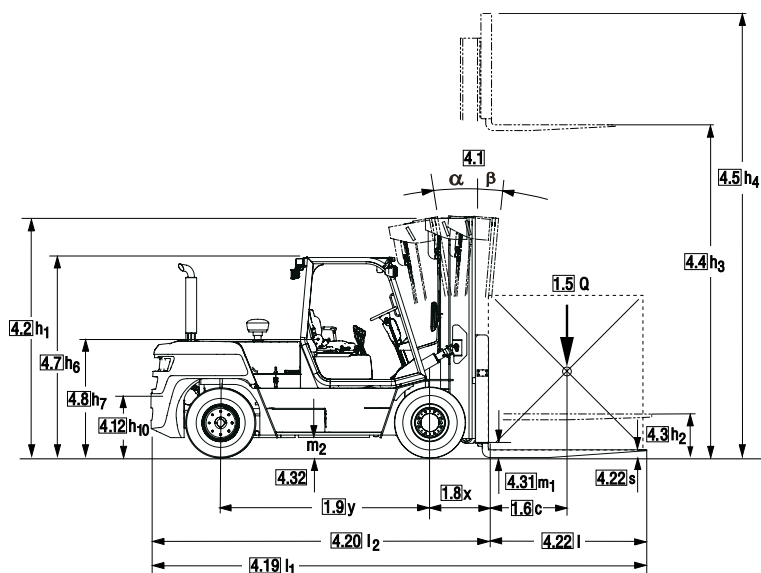

$$A_{st} = Wa + x + l_6 + a$$

gilt nur bei / applies only if $\frac{b_{12}}{2} < b_{13}$

$$A_{st} = Wa + \sqrt{(l_6 + x)^2 + \left(\frac{b_{12}}{2} - b_{13}\right)^2} + a$$

gilt nur bei / applies only if $\frac{b_{12}}{2} \geq b_{13}$

$$a = 200$$

For corresponding data see
Specification Chart.

SPECIFICATIONS

Product Specifications acc. to VDI 2198

1.1 Manufacturer (Abbreviation)		CLARK	CLARK	CLARK	CLARK
Specifications	1.2 Manufacturer's designation	C60D	C70D	C80D	C80D900
	1.3 Drive unit Diesel, L.P. Gas	Diesel	Diesel	Diesel	Diesel
	1.4 Operator type stand on / driver seated	Driver Seated	Driver Seated	Driver Seated	Driver Seated
	1.5 Load capacity / rated load Q (kg)	6000	7000	8000	8000
	1.6 Load centre distance c (mm)	600	600	600	900
	1.8 Load centre distance, centre of drive axle to fork face x (mm)	630	630	660	660
	1.9 Wheelbase y (mm)	2250	2250	2500	2500
WT	2.1 Service weight kg	10210	10570	11490	11840
	2.2 Axle loading, laden front / rear kg	14130 / 2080	15880 / 1710	17280 / 2190	17876 / 1964
	2.3 Axle loading, unladen front / rear kg	4460 / 5750	4750 / 5820	5040 / 6450	4884 / 6956
Tyres, Chassis	3.1 Tyre type, P = pneumatic, SE = superelastic, C = cushion *1	P	P	P	P
	3.2 Tyre size, front	8.25 x 15 - 14 PR	8.25 x 15 - 14 PR	8.25 x 15 - 18 PR	8.25 x 15 - 18 PR
	3.3 Tyre size, rear	8.25 x 15 - 14 PR	8.25 x 15 - 14 PR	8.25 x 15 - 18 PR	8.25 x 15 - 18 PR
	3.5 Wheels, number front/rear (x = drive wheels)	4 x / 2	4 x / 2	4 x / 2	4 x / 2
	3.6 Tread, front b10 (mm)	1575	1575	1575	1685
	3.7 Tread, rear b11 (mm)	1610	1610	1610	1610
Dimensions	4.1 Tilt of upright α = back / β = front Grad	10 / 15	10 / 15	10 / 15	10 / 15
	4.2 Height, upright lowered h1(mm)	2500	2500	2476	2796
	4.3 Freelift h2(mm)	110	110	233	233
	4.4 Lift height *2 h3(mm)	3300	3300	3300	3100
	4.5 Height, upright extended h4(mm)	4464	4464	4464	4214
	4.7 Height overheadguard (cab); Std / Container h6(mm)	2370	2370	2370	2370
	4.8 Seat height h7(mm)	1320	1320	1320	1320
	4.12 Coupling height h10(mm)	470	470	470	470
	4.19 Overall length l1(mm)	4723	4783	5095	5746
	4.20 Length to face of forks l2(mm)	3523	3583	3895	3900
	4.21 Width b1, b2 (mm)	2125	2125	2125	2235
	4.22 Fork dimensions s • e • l (mm)	60 x 150 x 1220	60 x 150 x 1220	70 x 180 x 1200	70 x 180 x 1800
	4.23 Fork carriage DIN 15173, A, B	Shaft type	Shaft type	Shaft type	Shaft type
	4.24 Fork carriage width b3 (mm)	2040	2040	2040	2040
	4.31 Ground clearance minimum m1 (mm)	216	216	216	216
	4.32 Ground clearance centre of wheelbase m2 (mm)	230	230	230	230
	4.33 Aisle width for pallets 1000 x 1200 crossways Ast(mm)	5250	5280	5616	6138
	4.34 Aisle width for pallets 800 x 1200 lengthways Ast(mm)	5450	5480	5816	6338
	4.35 Turning radius (mm)	3420	3450	3775	3838
	4.36 Internal turning radius b13 (mm)	1416	1497	1497	1497
Performances	5.1 Travel speed laden/unladen km/h	30.4 / 32.9	30.1 / 32.9	29.7 / 32.7	26.2 / 29.4
	5.2 Lift speed laden/unladen m/s	0.39 / 0.44	0.36 / 0.44	0.34 / 0.43	0.34 / 0.43
	5.3 Lowering speed laden/unladen m/s	0.45 / 0.43	0.45 / 0.43	0.45 / 0.43	0.45 / 0.43
	5.6 Max. drawbar pull laden/unladen *3 N	61985 / 20443	62103 / 22716	62181 / 24480	73755 / 33026
	5.8 Max. gradeability laden/unladen *3 %	44.1 / 21.4	38.6 / 21.6	34.56 / 21.6	37.1 / 24.1
	5.10 Service brake	Wet disc brake	Wet disc brake	Wet disc brake	Wet disc brake
I.C. – Engine	7.1 Manufacturer / Type *4	Deutz TD 3.6 L	Deutz TD 3.6 L	Deutz TD 3.6 L	Deutz TD 3.6 L
	7.2 Rated output acc. DIN 70 020 kW	55.4	55.4	55.4	55.4
	7.3 Rated speed acc. DIN 70 020 min-1	2300	2300	2300	2300
	7.4 No. of cylinders / displacement /cm3	4 / 3620	4 / 3620	4 / 3620	4 / 3620
	7.5 Fuel consumption acc. VDI-Cyclus Diesel = l/h, L.P.-Gas = kg/h	-	-	-	-
Miscellaneous	8.1 Type of control	Hydrodyn	Hydrodyn.	Hydrodyn.	Hydrodyn.
	8.2 Operating pressure for attachments *5 bar	Adjustable	Adjustable	Adjustable	Adjustable
	8.3 Oil volume for attachments l/min	max. 35	max. 35	max. 35	max. 35
	8.4 Sound level, driver's ear acc. EN 12053 dB (A)	80.5	80.5	80.5	80.5
	8.5 Towing coupling, class/type DIN	PIN	PIN	PIN	PIN

*1 Optional with superelastic tyres *2 Further lift heights see upright table *3 At friction coefficient $\mu = 0.6$ *4 Diesel = Stage 3b / LPG = Stage 0 (Option: Stage 4)

*5 Max. 140 bar

Performance may vary + 5 % and – 10 % due to motor and system efficiency tolerance. The performance shown represents nominal values which may be obtained under typical operating conditions of a machine. CLARK products and specifications are subject to change without notice.

Product Specifications acc. to VDI 2198


	1.1 Manufacturer (Abbreviation)	CLARK	CLARK	CLARK
Specifications	1.2 Manufacturer's designation	C60L	C70L	C75L
	1.3 Drive unit Diesel, L.P. Gas	LPG	LPG	LPG
	1.4 Operator type stand on / driver seated	Driver Seated	Driver Seated	Driver Seated
	1.5 Load capacity / rated load Q (kg)	6000	7000	7500
	1.6 Load centre distance c (mm)	600	600	600
	1.8 Load centre distance, centre of drive axle to fork face x (mm)	630	630	630
	1.9 Wheelbase y (mm)	2250	2250	2250
WT	2.1 Service weight kg	9077	9447	9590
	2.2 Axle loading, laden front / rear kg	13263 / 1814	14685 / 1762	15514 / 1576
	2.3 Axle loading, unladen front / rear kg	3998 / 5079	3877 / 5570	3934 / 5656
Tyres, Chassis	3.1 Tyre type, P = pneumatic, SE = superelastic, C = cushion *1	P	P	P
	3.2 Tyre size, front	8.25 x 15 - 14 PR	8.25 x 15 - 14 PR	8.25 x 15 - 14 PR
	3.3 Tyre size, rear	8.25 x 15 - 14 PR	8.25 x 15 - 14 PR	8.25 x 15 - 14 PR
	3.5 Wheels, number front / rear (x = drive wheels)	4 x / 2	4 x / 2	4 x / 2
	3.6 Tread, front b10 (mm)	1575	1575	1575
	3.7 Tread, rear b11 (mm)	1610	1610	1610
Dimensions	4.1 Tilt of upright α = back / β = front Grad	10 / 15	10 / 15	10 / 15
	4.2 Height, upright lowered h1(mm)	2650	2650	2650
	4.3 Freelif h2(mm)	110	110	110
	4.4 Lift height *2 h3(mm)	3300	3300	3300
	4.5 Height, upright extended h4(mm)	4464	4464	4464
	4.7 Height overheadguard (cab); Std / Container h6(mm)	2370	2370	2370
	4.8 Seat height h7(mm)	1320	1320	1320
	4.12 Coupling height h10(mm)	470	470	470
	4.19 Overall length l1(mm)	4723	4783	4783
	4.20 Length to face of forks l2(mm)	3523	3583	3583
	4.21 Width b1, b2 (mm)	2125	2125	2125
	4.22 Fork dimensions s • e • l (mm)	60 x 150 x 1200	60 x 150 x 1200	60 x 180 x 1200
	4.23 Fork carriage DIN 15173, A, B	Shaft type	Shaft type	Shaft type
	4.24 Fork carriage width b3 (mm)	2040	2040	2040
	4.31 Ground clearance minimum m1 (mm)	216	216	216
	4.32 Ground clearance centre of wheelbase m2 (mm)	230	230	230
	4.33 Aisle width for pallets 1000 x 1200 crossways Ast(mm)	5250	5280	5280
	4.34 Aisle width for pallets 800 x 1200 lengthways Ast(mm)	5450	5480	5480
Performances	4.35 Turning radius (mm)	3420	3450	3450
	4.36 Internal turning radius b13 (mm)	1063	1063	1063
	5.1 Travel speed laden / unladen km/h	29.3 / 31.4	29.0 / 30.2	28.3 / 29.6
	5.2 Lift speed laden / unladen m/s	0.44 / 0.49	0.42 / 0.49	0.39 / 0.49
	5.3 Lowering speed laden / unladen m/s	0.45 / 0.43	0.45 / 0.43	0.45 / 0.43
	5.6 Max. drawbar pull laden / unladen *3 N	58345 / 23347	62784 / 22661	59448 / 22955
I.C. – Engine	5.8 Max. gradeability laden / unladen *3 %	41.0 / 21.4	42.2 / 20.0	38.4 / 20.0
	5.10 Service brake	Wet disc brake	Wet disc brake	Wet disc brake
	7.1 Manufacturer / Type *4	PSI 4X Stage 0 (4)	PSI 4X Stage 0 (4)	PSI 4X Stage 0 (4)
	7.2 Rated output acc. DIN 70 020 kW	58.7 (82)	58.7 (82)	58.7 (82)
	7.3 Rated speed acc. DIN 70 020 min-1	2200 (2400)	2200 (2400)	2200 (2400)
	7.4 No. of cylinders / displacement /cm3	6 / 4300	6 / 4300	6 / 4300
Miscellaneous	7.5 Fuel consumption acc. VDI-Cyclus Diesel = l/h, L.P.-Gas = kg/h	-	-	-
	8.1 Type of control	Hydrodyn.	Hydrodyn.	Hydrodyn.
	8.2 Operating pressure for attachments *5 bar	Adjustable	Adjustable	Adjustable
	8.3 Oil volume for attachments l/min	max. 35	max. 35	max. 35
	8.4 Sound level, driver's ear acc. EN 12053 dB (A)	82.7	82.7	82.7
	8.5 Towing coupling, class / type DIN	PIN	PIN	PIN

*1 Optional with superelastic tyres *2 Further lift heights see upright table *3 At friction coefficient $\mu = 0.6$ *4 Diesel = Stage 3b / LPG = Stage 0 (Option: Stage 4)
 *5 Max. 140 bar

Performance may vary + 5 % and – 10 % due to motor and system efficiency tolerance. The performance shown represents nominal values which may be obtained under typical operating conditions of a machine. CLARK products and specifications are subject to change without notice.

GENERAL DATA

Truck Capacities Capacity at different load centres

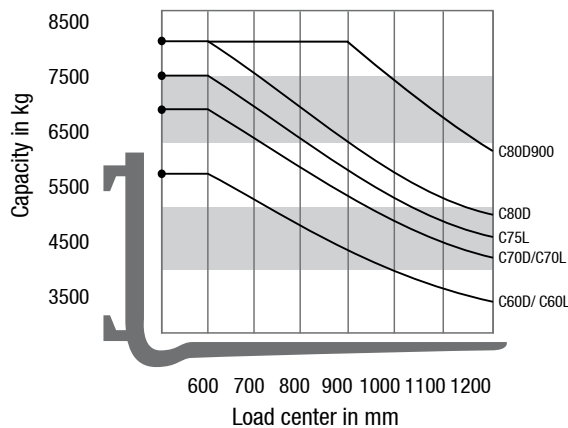

Note:

The listed capacities are valid only for the standard upright in vertical position with standard fork carriage and standard forks, up to max. lifting height of 3300 mm. The centre of gravity of the load may be displaced by max. 100 mm against the longitudinal centre plane of the truck. Load centre is determined from top and front face of the forks. The values are based on a 1000 mm cube load configuration with the centre of gravity at the true centre of the cube. With upright tilted forward lower capacity values are valid. Attachments, longer forks, exceptional load dimensions and higher lifting heights can reduce the capacity. Please talk to your CLARK dealer if you require further information.

Upright table C60D/C70D

Mast type	Maximum Fork Height (h3)	Mast		Freihub (h2)
		Lowered (h1)	Extended	
	mm	mm	mm	mm
Standard	2500	2250	3664	110
	2700	2350	3864	
	3000	2500	4164	
	3300	2650	4464	
	3500	2750	4664	
	3700	2850	4864	
	4000	3000	5164	
	4500	3250	5664	
	5000	3500	6164	
	5500	3750	6664	
Triple	6000	4200	7164	110
	6400	4400	7564	
	3850	2313	4980	
	4000	2363	5130	
	4500	2531	5634	
	4900	2665	6036	
	6200	3097	7332	
	7000	3363	8140	
	8000	3695	9140	2593

Upright table C60L/C70L/C75L

Mast type	Maximum Fork Height (h3)	Mast		Freihub (h2)
		Lowered (h1)	Extended	
	mm	mm	mm	mm
Standard	2500	2250	3664	110
	2700	2350	3864	
	3000	2500	4164	
	3300	2650	4464	
	3500	2750	4664	
	3700	2850	4864	
	4000	3000	5164	
	4500	3250	5664	
	5000	3500	6164	
	5500	3750	6664	
Triple	6000	4200	7164	110
	6400	4400	7564	
	3850	2313	4980	
	4000	2363	5130	
	4500	2531	5634	
	4900	2665	6036	
	6200	3097	7332	
	7000	3363	8140	
	8000	3695	9140	2593

Upright table C80D

Mast type	Maximum Fork Height (h3)	Mast		Freihub (h2)
		Lowered (h1)	Extended	
	mm	mm	mm	mm
Standard	2300	2226	3464	223
	2500	2326	3664	
	2800	2476	3964	
	3100	2626	4264	
	3300	2726	4464	
	3500	2826	4664	
	3800	2976	4964	
	4300	3226	5464	
	4800	3476	5964	
	5300	3726	6464	
Triple	5800	3976	6964	223
	6200	4176	7364	
	3650	2313	4790	
	3800	2363	4940	
	4300	2531	5444	
	4700	2665	5846	
	6000	3097	7142	
	6800	3363	7950	
	7800	3695	8950	2593

Upright table C80D900

Mast type	Maximum Fork Height (h3)	Mast		Freihub (h2)
		Lowered (h1)	Extended	
	mm	mm	mm	mm
Standard	3100	2976		233
	3600	3046		
	4600	3546		
	5600	4046		223
	6000	4246		
Triple	4700	2866		1764
	5430	3096		1994
	6030	3296		2194

Performance may vary + 5 % and - 10 % due to motor and system efficiency tolerance. The performance shown represents nominal values which may be obtained under typical operating conditions of a machine. CLARK products and specifications are subject to change without notice.

PRODUCT DESCRIPTION

Drawing on the many years of manufacturing in the 6 to 8 ton range of forklifts, Clark offers with the C60-80 series the optimized collection of high quality components making for an extremely powerful truck. The combination of a capable efficient 67kW diesel engine, a fully automatic three speed gearbox and wet disc brakes as a standard together with a one piece robust frame makes this series extraordinary strong and tough. The low operating and maintenance costs as well as the ergonomic designed operator compartment are also highlights of this series of trucks.

Exactly what you rightly can expect from a heavy duty truck produced by CLARK.

Driver's cab

The driver accesses his ergonomically designed compartment via two large, low positioned steps from either side of the machine. A grab handle on the driver's side of entry makes it easy to climb up and down without effort. A full width rubber floor covering in the footwell area prevents slippage.

The adjustable steering column (30°) with two spoke steering wheel, an easy to adjust, comfortable operators seat, together with impressive leg room allow perfect adaptation to any driver.

Automotive style foot pedals and fully directional hood mounted control levers marked with international symbols avoid confusion for any operator.

A clear TFT LCD colour display ensures all operating data is available in real time.

A low front cowl and ingenious narrow profile arrangement of the chains and hoses on the upright ensure a wide field of vision for the driver.

Easily accessible storage compartments and an ideally positioned automotive style hand brake, set this driver's cab apart. Additionally this series offers protected storage compartments integrated in the vehicle frame.

Engine, Transmission

The CLARK C60-80 forklifts with LPG or diesel power offer excellent acceleration and high driving performance coupled with low fuel consumption. These extremely powerful modern engines are at the top end of the performance class. The 55.4 kW Deutz 3.6 litre engine gives excellent power and good acceleration. The Deutz Diesel Engine - meets all EU exhaust gas emission (Stage 3b). A complete new developed engine with high peak torque. With the installed DVERT® Oxidation Catalyst (DOC) there is no machine downtime. The exhaust after treatment is done during the operation. Alternative systems with DPF (Diesel-Particle-Filter) require a regeneration process, which means truck downtime during the operation.

The 6 cylinders PSI 4X LPG engine with internal balancer runs very smoothly even under load.

An Optional three-way exhaust catalyst converter is available for the LPG version. Both engines are connected to a fully automatic "Power-Shift" three speed transmission to make precise and comfortable working possible.

A Heavy-Duty flexible coupling of the engine / transmission and drive axle reduces vibrations and noises to a minimum.

All engines comply with the latest EU directives ensuring low noise and exhaust emissions.

Brake system

All the trucks of this series have wet disc service brakes and an independent drum parking brake as standard. When the parking brake is applied, the transmission is placed in neutral to avoid any unintentional driving against the parking brake.

The wet disc brakes have minimum abrasion, are maintenance free and allow very sensitive braking even with a heavy load. Power assisted foot brakes ensure a relaxed and stress free operation allowing the operator to work in a free manner with full focus on the task in hand. Remember, a stress free comfortable operator, works always at his peak ensuring optimum productivity over the complete shift.

Steering system

The hydrostatic power steering eliminates steering Kick-Back, makes steering easy and reaches full lock with just a few turns of the steering wheel. The steering axle has pivotal bearings mounted in rubber steel elements. The spherical bearing mounted short tie rods are adjustment free and guarantee precise and continuous driving in a straight line. The double acting steer cylinder ensures precise and direct steering. The axle king pins are mounted in lubricated tapered roller bearings for long service life.

Hydraulic system

A full-flow reverse filter, filters the oil to the tank at each reverse flow. Rough particles are filtered directly via a suction filter, thereby preventing them from entering the oil circuit, ensuring a long service life for all hydraulic components. Enough hydraulic oil is always available for all functions, because a high-capacity pump provides adequate oil supply for the upright and the hydrostatic steering. A priority distributor ensures steering priority in all conditions. Load handling is controlled via a load sensitive-response and precise control valve. A safety valve provides extra safety and prevents an uncontrolled lowering of the load at all times.

Upright

The clear-view uprights are available in Standard and Triplex versions. The heavy duty interlocked narrow profiles provide high strength even under the heaviest load. The canted (Angled) mounted rollers are adjusted or exchangeable without disassembling the upright.

The tilt cylinders are mounted in spherical bearings allowing free movement. This consequently extends the service life of the complete cylinder. An integral tilt-lock valve prevents unintentional tilting of the upright when the power is off.

The heavy duty tapered forged forks with hook or shaft mounting are adjustable and locked by individual pins.

A hydraulic dampening system reduces impacts and vibrations during the transition between the individual lifting sections whilst raising or lowering, thus protecting the products and extending service life. The sturdy 6-roller fork carriage with adjustable side thrust rollers enhances the durability of this design, preventing carriage "Jamming" when handling off-set loads.

Additional standard equipment

Protected front headlights, direction indicator lights, combination rear lights with brake lights and white reversing lights, pneumatic tyres, acoustic reversing alarm, paintwork in the bright safety colour "CLARK Green", driver's compartment and upright in black, rims in white.

Additional equipment

SE tyres, attachments, air-conditioned or heated cabs, integrated or hook on sideloaders, quick-release couplings, spark protection, various seats and much more.

Certification

The C60-80 series is CE certified and corresponds to all European safety standards for forklift trucks.

Talk to your CLARK dealer to find the optimum equipment for you.

Dealer:

CLARK Europe GmbH
Dr.-Alfred-Herrhausen-Allee 33
47228 Duisburg / Germany
Tel.: +49 (0)2065 499 13-0
Fax: +49 (0)2065 499 13-290
E-Mail: Info-europe@clarkmheu.com
www.clarkmheu.com